

DATASHEET

AQUAswitch™

Subsea electrical switch



IDEAL FOR INTEGRATION IN SUBSEA SYSTEMS

KEY FEATURES


- Designed for ROVs and divers
- Robust and durable
- User-changeable switch configuration
- Positive detents in on/off positions
- No power needed to operate
- 6 Amps continuous, 3 Amps switching
- 400 VDC (240 VAC)
- 100 Watts total load

TECHNICAL SPECIFICATIONS

| | |
|------------------------|---|
| Maximum voltage rating | 400 VDC (240 VAC) |
| Maximum current rating | 6 Amps continuous, 3 Amps switching |
| Maximum Power | 100 Watts total load |
| Connector | MCBH2M |
| Switch Configuration | Normally Open/Normally closed contact (User changeable) |
| Attachments | 2 mounting holes |
| Maximum depth | 6,000 m |
| Weight | 4.25 kg |
| Dimensions | 180 mm diameter x 98 mm (excluding connector) |

FEATURED IN THE HYDROskid™ 3000

Aquatec's HYDROskid™ 3000 is a complete standalone hydrotest monitoring system.

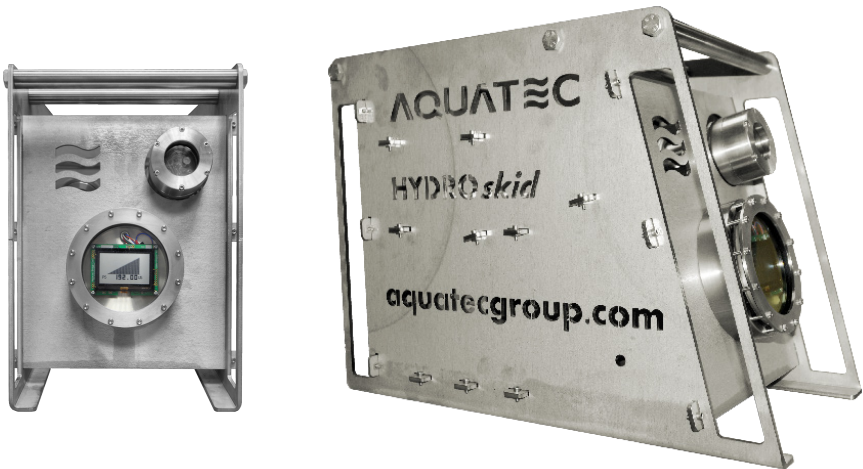

Contact us

t +44 (0)1256 416010 (UK) **t** 1-281-220-6035 (USA)
e inquiry@aquatecgroup.com www.aquatecgroup.com

AQUAswitch™ is a trademark of Aquatec Group Limited. All trademarks & registered trademarks are acknowledged. Aquatec reserves the right to make changes to the specifications contained in this document without notice in the interests of maintaining or improving product quality. Document copyright © 2019 Aquatec Group. AQSWD - Jun19 v1. Aquatec Group Ltd, Aquatec House, Stroudley Road, Basingstoke, RG24 8FW. Registered in England & Wales No 2523284